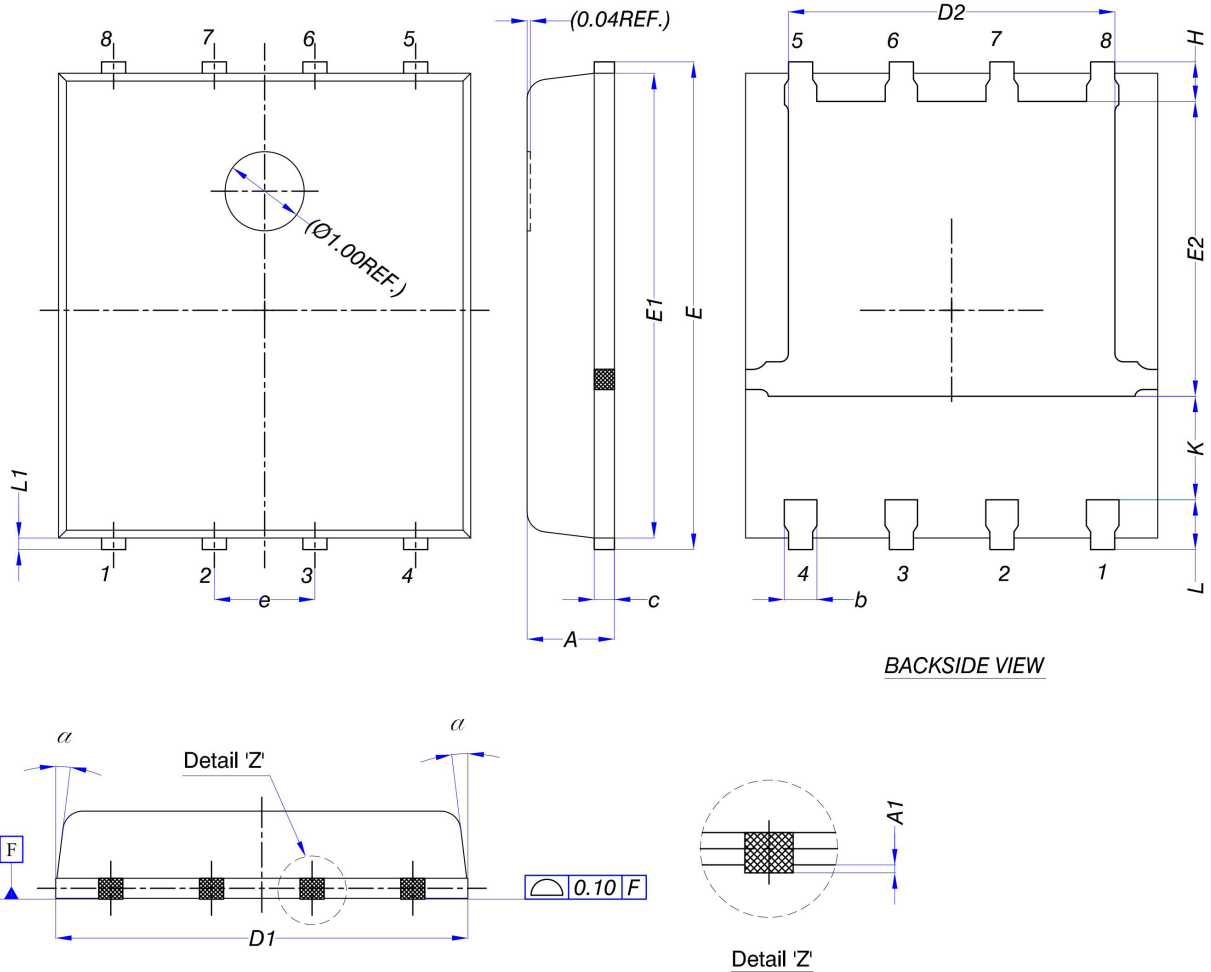


**PDFN5060X Package Outline Data**


Symbol	DIMENSIONS ( unit : mm )		
	Min	Typ	Max
<b>A</b>	1.00	1.10	1.20
<b>A1</b>	0.00	--	0.05
<b>b</b>	0.30	0.40	0.50
<b>c</b>	0.20	0.25	0.30
<b>D1</b>	5.00	5.20	5.40
<b>D2</b>	3.80	4.10	4.25
<b>E</b>	5.95	6.15	6.35
<b>E1</b>	5.66	5.86	6.06
<b>E2</b>	3.52	3.72	3.92
<b>e</b>	1.27 BSC		
<b>H</b>	0.40	0.50	0.60
<b>K</b>	1.10	--	--
<b>L</b>	0.50	0.60	0.70
<b>L1</b>	0.08	0.15	0.22
<b><math>\alpha</math></b>	0°	--	12°

**Notes:**

1. Refer to JEDEC MO-240 variation AA.
2. Dimensions "D1" and "E1" do NOT include mold flash protrusions or gate burrs.
3. Dimensions "D1" and "E1" include interterminal flash or protrusion. Interterminal flash or protrusion shall not exceed 0.25mm per side.

**Customer Service**
**Sales and Service:**
[sales@vgsemi.com](mailto:sales@vgsemi.com)
**Vanguard Semiconductor CO., LTD**
**TEL:** (86-755) -26902410

**FAX:** (86-755) -26907027

**WEB:** [www.vgsemi.com](http://www.vgsemi.com)